
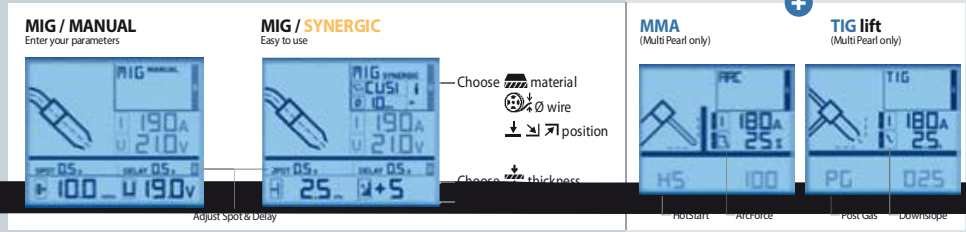


# MIG/MAG INVERTER

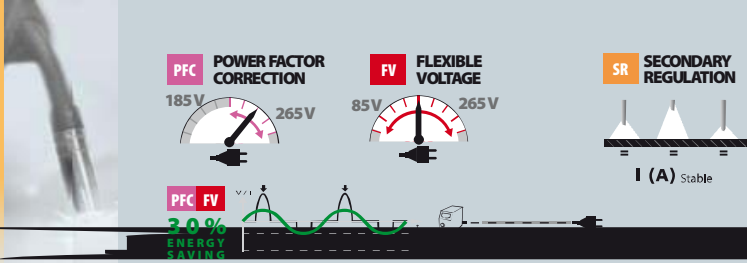

**NEW 11/2013**

**PEARL 150-2**

20 **▲** 150A

Ref. with accessories: **032019** 14kg

150A on 13A fuse

**PEARL 180-2**

20 **▲** 180A

Ref. with accessories: **033351** 10kg

180A on 13A fuse

**PEARL 180-4 XL**

20 **▲** 180A

Ref. with accessories: **033382** 18kg

**NEW 01/2014**

**PEARL 190-2**

20 **▲** 190A

Ref. with accessories: **032002** 12kg

190A on 13A fuse

**NEW 01/2014**

**PEARL 190-4 XL**

20 **▲** 190A

Ref. with accessories: **031999** 20kg

**NEW 03/2014**

**Multi PEARL**

20 **▲** 200A

Ref. with accessories: **031944** 12kg



**3 in 1**



CONSUMMABLES / CONSUMABLES	OPTIONS	OPTIONS MULTI PEARL
Torch MB 15 Ref. 041226	20L/min (FR) Ref. 041998 (UK) Ref. 040274 (NL) Ref. 040267	TIG TORCH KIT SRI 7V (valve) 4 m 10/25mm <sup>2</sup> Ref. 044425
	30L/min (FR) Ref. 041622 (UK) Ref. 041646 (DE) Ref. 041219 (NL) Ref. 041615	EURO
	AR / CO <sub>2</sub> Gaz Jetable Disposable bottle Einweg Gasflaschen	TIG TORCH KIT SRI 7 DB 4 m Ref. 045385
	2,2 L (220L) Ref. 043671	200A 4m 10/25mm <sup>2</sup> Ref. 043848

MADE IN FRANCE 60974/1	50/60 Hz	A	INTEGRATED TECHNOLOGY			I <sub>2</sub>	I <sub>2</sub>	min-max	Ømm	Electronic Control	MIG		EN60974-1 (40°C)	Uo (V)	Equipment d'origine Original equipment Equipamiento de fabrica	cm /kg	Protected & compatible power regulator (4-15%)
			PFC	FV	SR						GAS	NO GAS					
<b>PEARL 150-2</b> Ref. 032019	230V 1~	13	■	■	■	—	—	20+150	100 200 300	■	■	90 150A@26%	67	0,6/0,8	0,8	23x43x33 / 14	7,5 kW 9kVA
<b>PEARL 180-2</b> Ref. 033351	110V 1~	32	■	■	■	—	—	20+120	—	■	■	110 120A@45%	83,4	0,6/0,8	0,8	20x45x36 / 10	7,5 kW 9kVA
<b>PEARL 180-4 XL</b> Ref. 033382	230V 1~	13	■	■	■	—	—	20+180	—	■	■	110 120A@45%	83,4	0,6/0,8	0,8	25x55x44 / 18	7,5 kW 9kVA
<b>PEARL 190-2</b> Ref. 032002	110V 1~	32	■	■	■	—	—	20+120	—	■	■	110 120A@45%	83,4	0,6/0,8	0,8	20x45x36 / 12	7,5 kW 9kVA
<b>PEARL 190-4 XL</b> Ref. 031999	230V 1~	13	■	■	■	—	—	20+190	—	■	■	110 120A@45%	83,4	0,6/0,8	0,8	25x55x44 / 20	7,5 kW 9kVA
<b>Multi PEARL</b> Ref. 031944	110V 1~	32	■	■	■	120	5+120	20+190	—	■	■	110 120A@45%	96	0,6/0,8	0,8	23x45x36 / 12	7,5 kW 9kVA

GYS PEARL MIG/MAG INVERTER